



EIN Seildurchmesser – DREI Wantenspanner-Generationen

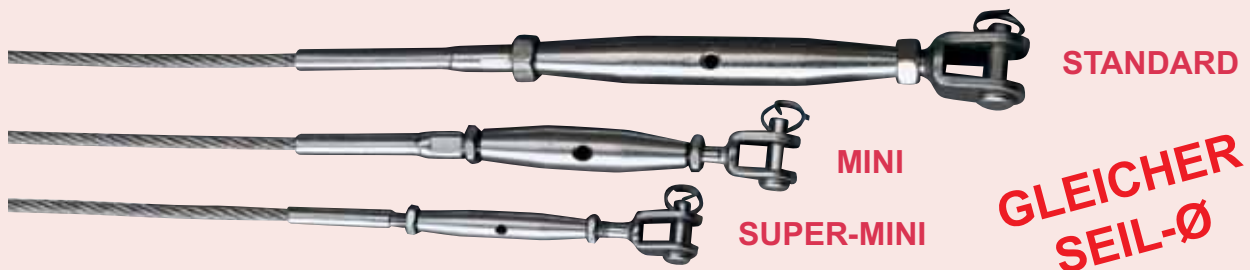

NIRO Wantenspanner

mit zwei Terminals, Standard


Seil-Ø [mm]	Gewinde d ₁	d ₂ [mm]	d ₃ [mm]	L ₁ [mm]	L ₂ [mm]	Bestellnummer
2,5	M 5	5,4	2,7	80	178	562305002
3	M 6	6,3	3,3	95	203	562306003
4	M 8	7,5	4,3	105	225	562308004
5	M 10	9,0	5,3	125	260	562310005
6	M 12	12,5	6,3	150	335	562312006

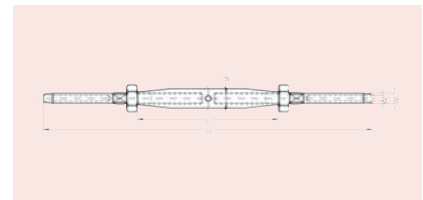

NIRO Mini-Wantenspanner

mit zwei Terminals


Seil-Ø [mm]	Gewinde d ₁	d ₂ [mm]	d ₃ [mm]	L ₁ [mm]	L ₂ [mm]	Bestellnummer
3	M 5	6,3	3,3	50	123	562405003
4	M 6	7,5	4,3	60	158	562406004
5	M 8	9,0	5,3	60	169	562408005
6	M 10	12,5	6,3	80	220	562410006

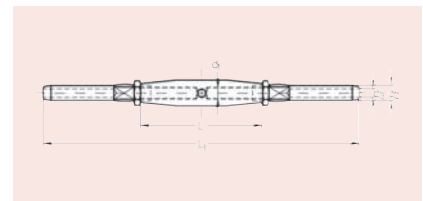

NIRO Super-Mini-Wantenspanner

mit zwei Terminals


Seil-Ø [mm]	Gewinde d ₁	d ₂ [mm]	d ₃ [mm]	L ₁ [mm]	L ₂ [mm]	Bestellnummer
3	M 4	5,4	3,3	40	96	562504003
4	M 5	6,5	4,3	50	110	562505004
5	M 6	7,5	5,3	60	134	562506005
6	M 8	9,0	6,3	60	142	562508006

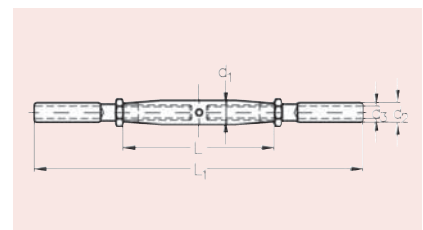

NIRO Wantenspanner

mit Gabel und Terminal, Standard


Seil-Ø [mm]	Gewinde d ₁	d ₂ [mm]	d ₃ [mm]	h [mm]	s [mm]	b [mm]	L [mm]	L ₁ [mm]	Bestellnummer
2,5	M 5	5,4	2,7	9	6	5	80	150	562605002
3	M 6	6,3	3,3	8,5	7	6	95	175	562606003
4	M 8	7,5	4,3	11	10	8	105	200	562608004
5	M 10	9,0	5,3	12	12	9	125	225	562610005
6	M 12	12,5	6,3	21	13	12	150	280	562612006
7	M 14	14,2	7,3	22	14	14	165	320	562614007
8	M 16	16,0	8,3	26	17	16	190	390	562616008
10	M 20	17,8	10,5	29	20	19	210	415	562620010

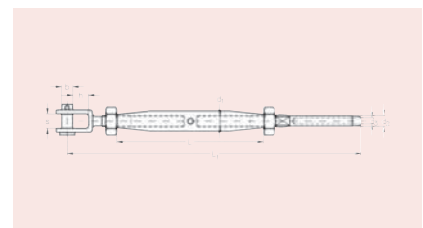

NIRO Mini-Wantenspanner

mit Gabel und Terminal


Seil-Ø [mm]	Gewinde d ₁	d ₂ [mm]	d ₃ [mm]	h [mm]	s [mm]	b [mm]	L [mm]	L ₁ [mm]	Bestellnummer
3	M 5	6,3	3,3	9	7	5	50	107	562805003
4	M 6	7,5	4,3	8	8	6	60	133	562806004
5	M 8	9,0	5,3	11	11	8	60	142	562808005
6	M 10	12,5	6,3	13	12	9	80	190	562810006

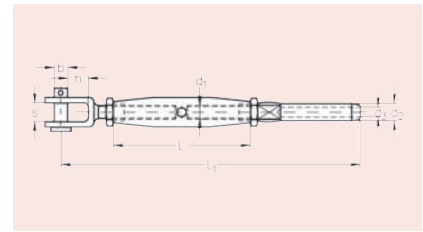

NIRO Super-Mini-Wantenspanner

mit Gabel und Terminal


Seil-Ø [mm]	Gewinde d ₁	d ₂ [mm]	d ₃ [mm]	h [mm]	s [mm]	b [mm]	L [mm]	L ₁ [mm]	Bestellnummer
3	M 4	5,4	3,3	9	7	5	40	88	562904003
4	M 5	6,5	4,3	9	7	5	50	102	562905004
5	M 6	7,5	5,3	8	8	6	60	118	562906005
6	M 8	9,0	6,3	11	11	8	60	130	562908006

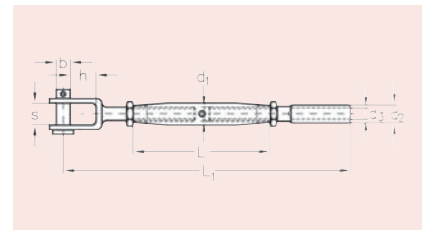

NIRO Wantenspanner

mit zwei Gabeln, Standard


Nenngröße	Gewinde d ₁	h [mm]	s [mm]	b [mm]	L [mm]	L ₁ [mm]	Bestellnummer
M 5	M 5	9	6	5	80	120	563005000
M 6	M 6	8,5	7	6	95	145	563006000
M 8	M 8	11	10	8	105	165	563008000
M 10	M 10	13	12	9	125	195	563010000
M 12	M 12	21	13	12	150	246	563012000
M 14	M 14	22	14	14	165	270	563014000
M 16	M 16	26	17	16	190	325	563016000
M 20	M 20	29	20	19	210	380	563020000

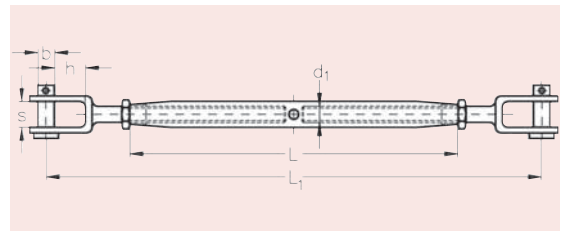

NIRO Mini-Wantenspanner

mit zwei Gabeln


Nenngröße	Gewinde d ₁	h [mm]	s [mm]	b [mm]	L [mm]	L ₁ [mm]	Bestellnummer
M 4	M 4	9	7	5	40	80	563104000
M 5	M 5	9	7	5	50	92	563105000
M 6	M 6	8	8	6	60	105	563106000
M 8	M 8	11	11	8	60	120	563108000
M 10	M 10	13	12	9	80	152	563110000

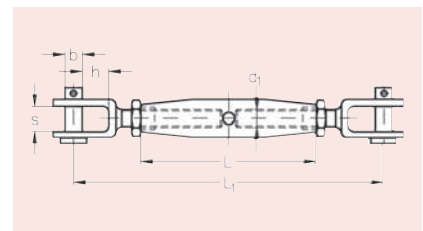

NIRO Wantenspanner-Mittelstück

Standard


Nenngröße	Gewinde d ₁	L [mm]	Bestellnummer
M 5	M 5	80	563205000
M 6	M 6	95	563206000
M 8	M 8	105	563208000
M 10	M 10	125	563210000
M 12	M 12	150	563212000

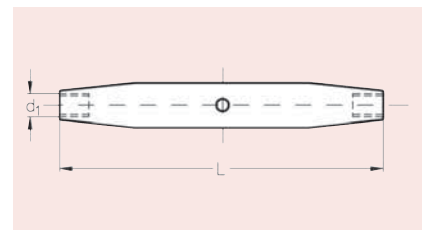

NIRO Wantenspanner-Mittelstück

für Mini und Super-Mini


Nenngröße	Gewinde d ₁	L [mm]	Bestellnummer
M 4	M 4	40	563304000
M 5	M 5	50	563305000
M 6	M 6	60	563306000
M 8	M 8	60	563308000
M 10	M 10	80	563310000

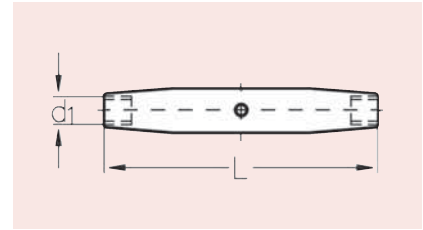

NIRO Wantenspanner

mit Auge und Terminal, Standard


Seil-Ø [mm]	Gewinde d ₁	d ₂ [mm]	d ₃ [mm]	a [mm]	s [mm]	L [mm]	L ₁ [mm]	Bestellnummer
2,5	M 5	5,4	2,7	5,5	3	80	156	563405002
3	M 6	6,3	3,3	6,5	4	95	168	563406003
4	M 8	7,5	4,3	8,5	5	105	200	563408004
5	M 10	9,0	5,3	10,5	6	125	234	563410005
6	M 12	12,5	6,3	13,0	8	150	280	563412006
8	M 16	16,0	8,3	14,5	10	190	362	563416008
10	M 20	17,8	10,5	19,5	15	215	405	563420010

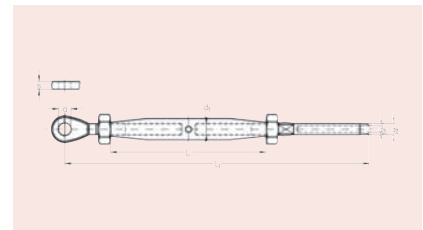

NIRO Mini-Wantenspanner

mit Auge und Terminal


Seil-Ø [mm]	Gewinde d ₁	d ₂ [mm]	d ₃ [mm]	a [mm]	s [mm]	L [mm]	L ₁ [mm]	Bestellnummer
3	M 5	6,3	3,3	5,5	3	50	11	563505003
4	M 6	7,5	4,3	6,5	4	60	130	563506004
5	M 8	9,0	5,3	8,5	5	60	139	563508005
6	M 10	12,5	6,3	10,5	6	80	181	563510006

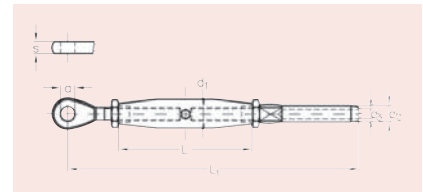

NIRO Mini-Wantenspanner

mit Gewindestange und Terminal

Seil-Ø [mm]	Gewinde d ₁	d ₂ [mm]	d ₃ [mm]	L [mm]	L ₁ [mm]	Bestellnummer
3	M 5	6,3	3,3	50	124	563605003
4	M 6	7,5	4,3	60	152	563606004
5	M 8	9,0	5,3	60	168	563608005
6	M 10	12,5	6,3	80	215	563610006

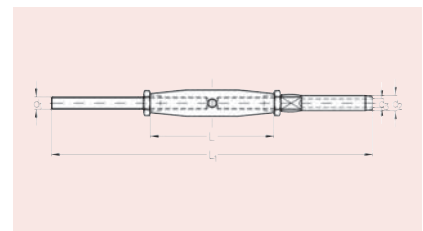

Bei den oben aufgeführten Wantenspannern wurde jeweils das Terminal mit Linksgewinde montiert, während das Gewindeauge bzw. die Gewindestange ein Rechtsgewinde haben.

